

OVERVIEW & PARAMETERS

LEFOO

LFT3080

Anticorrosive liquid level transmitter

Product Operating Instructions




Electrical Connection

4~20mA	RS485	0~10V

1: red 2: yellow 3: blue 4: black

Size (mm)

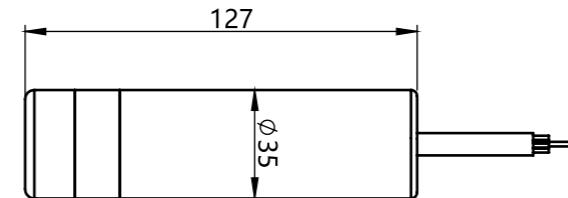

Working Temperature

-10~70°C

Waterproof grade

IP68

01


Medium

Liquids compatible with ceramics , polytetrafluoroethylene (PTFE), fluorine rubber (FKM), perfluoroether rubber (FFKM)


Supply Voltage

LFT3080	Output	4~20mA	0~10V	RS485
	Voltage	10~36VDC	15~36VDC	10~36VDC

Installation

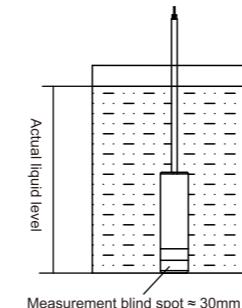

Attention should be paid to keeping the wiring harness perpendicular to the ground during the investment type liquid level

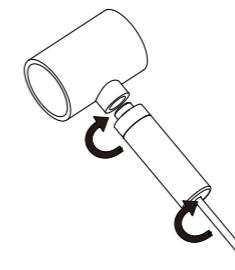

Wire and sensor rotate simultaneously to prevent wire breakage

02