

## OVERVIEW

LFT700 can accurately measure the pressure of liquid, gas or steam, and convert it into 4~20mA output signal. The Transmitter can be operated through three buttons on the device, or by hand manipulator, or configuration software. The display and configuration can be adjusted without impacting the 4~20mA output signal. It is widely used in pressure measurement in industrial sites such as petroleum, chemical, electric power, and hydrology.



## STANDARD SPECIFICATIONS

Pressure range is calibrated based on the standard zero point, stainless steel 316L diaphragm, filled liquid is silicone oil.

## PERFORMANCE REQUIREMENT

Overall performance includes but not limited to reference accuracy, static pressure influence, ambient temperature influence, and other influence.

Typical accuracy:  $\pm 0.075\%$  of Upper Range Value (URV)

Annual stability:  $\pm 0.2\%$  of Upper Range Value (URV)

### 1) Pressure calibration reference accuracy

Including linearity, hysteresis and repeatability from zero point			
Linear output accuracy	TD≤10	±0.075%	Standard range: 6kPa, 40kPa, 250kPa, 1MPa, 3MPa, 10MPa
	10 < TD≤100	±0.0075TD%	
TD is range turn down ratio. when $ URV  \geq  LRV $ , TD=URLV/URV when $ URV  \leq  LRV $ , TD=URLV/LRV			

### 2) Ambient temperature influence on partial gauge pressure range

For 6kPa or lower range, the accuracy under room temperature is 0.075%, but if within full range of -20~70°C, the accuracy is 0.15%.

### 3) Power supply influence

When the power supply voltage varies within 12~36 VDC, if zero point and span variation not exceed  $\pm 0.005\% \times \text{URV}$  per voltage, the influence can be ignored.

## FUNCTIONAL SPECIFICATION

### 1) Range selection

Within the upper range limit (URL) and lower range limit(LRL), you can adjust the TD value within the allowable range to select the range. For example, if URL and LRL -40~40kPa, then adjust the TD value to 10 and select the output of 0~4kPa or -4~4kPa. To ensure accuracy, the TD value should be as small as possible, generally within 10.

### 2) Zero point setting

Zero and Span can be adjusted to any value within the measuring range in the table, as long as calibrated span  $\geq$  minimum span.

### 3) Impact of the installation position

Installation at any position, if offset pressure not more than 400Pa, can be corrected by zero clearing.

### 4) Range

Gauge pressure

Range/Upper and lower range limits(URL&LRL)		kPa	Range ratio TD
B	Range	0.2~6	1~30
	URL&LRL	-6~6	
C	Range	0.4~40	1~100
	URL&LRL	-40~40	
D	Range	2.5~250	1~100
	URL&LRL	-100~250	
E	Range	10~1000	1~100
	URL&LRL	-100~1000	
F	Range	30~3000	1~100
	URL&LRL	-100~3000	
G	Range	100~10000	1~100
	URL&LRL	-100~10000	

### Absolute pressure

Range/Upper and lower range limits(URL&LRL)		kPa	Range ratio TD
H	Range	0~100~250kPa	1~3
	URL&LRL	0~250kPa	
I	Range	0~0.1~1MPa	1~10
	URL&LRL	0~1MPa	
J	Range	0~0.1~3MPa	1~30
	URL&LRL	0~3MPa	

### 5) Output

Signal	Type	Output method
4~20mA	linear	two-wire
4~20mA+HART	linear	two-wire
RS485	linear	four-wire

### 6) Alarm current

Low alarm mode (minimum): 3.8 mA

High alarm mode (maximum): 20.8 mA

No alarm mode (hold): maintain the effective current value before the fault

Alarm current standard setting: high alarm mode

### 7) Response time

Total damping constant time: equal to the sum of the damping time constants of the electronic circuit components and the sensor diaphragm box;

Damping time of electronic circuit components: adjustable from 0~60 seconds;

Sensor diaphragm box damping time:  $\leq 0.2\text{s}$ ;

Power-on start-up time after power failure:  $\leq 5\text{s}$ ;

Data recovery time to normal use:  $\leq 2\text{s}$ ;

### 8) Environmental temperature



Item	Spec
Ambient working temperature	-20~70°C with display
Storage temperature	-40~85°C
Operating ambient humidity	5~100%RH@40°C
Protection	IP65
Dangerous occasions	ExdIICT6

## INSTALL

### 1) Power supply and load conditions


Output	Power Supply Requirement
Current	14.5~36VDC, load resistance during communication 250 ~600Ω
RS485	12-36VDC

R(Ω)load resistance

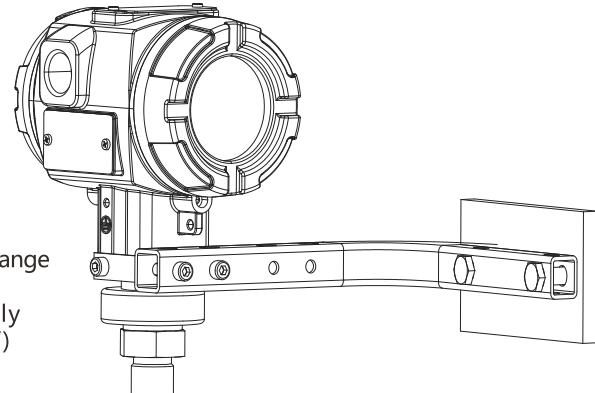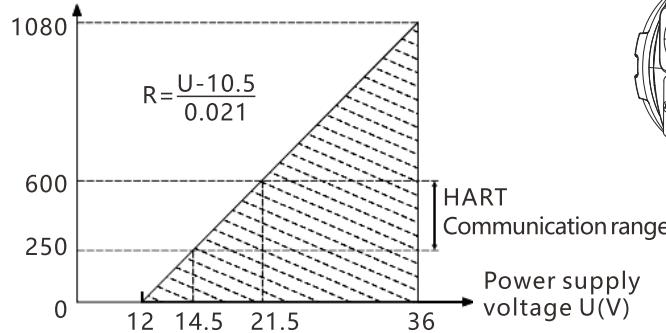

### 2) Electrical connection


Item	Description
Electrical connection	Aluminum alloy junction box, 2 wire outlet ports with female thread M20*1.5, the main body is light blue, white cover
Wire outlet protection	One end with M20*1.5 waterproof connector, the other end with plug, PVC material, suitable for wire diameter 6-8mm, protection class IP65
	Explosion-proof configuration, one end with female NPT1/2 thread, the other end with a plug, stainless steel, for wire diameter 6-8mm, protection class IP65
	Explosion-proof configuration, one end with internal thread M20*1.5, the other end with plug, stainless steel, for wire diameter 6-8mm, protection class IP65

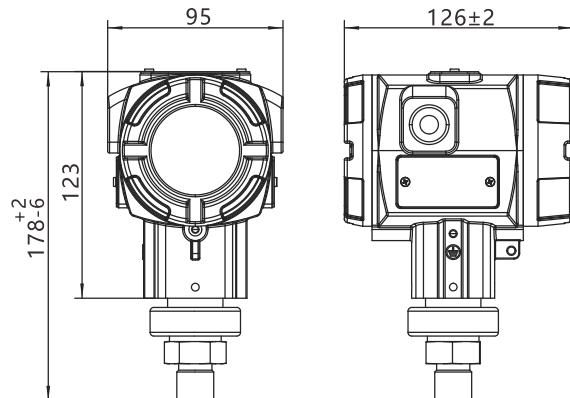

## PHYSICAL SPECIFICATIONS

Measuring Diaphragm Enclosure	Stainless steel, 316L
Diaphragm	316L, Hastelloy, Tantalum
Process flange	Stainless steel 304, stainless steel 316L
Threaded specifications	M20*1.5, G1/2, NPTF1/2, and others
Transmitter housing	Aluminum alloy
Housing seal	Nitrile rubber (NBR)
Nameplate	Stainless Steel 304

## ELECTRICAL CONNECTION

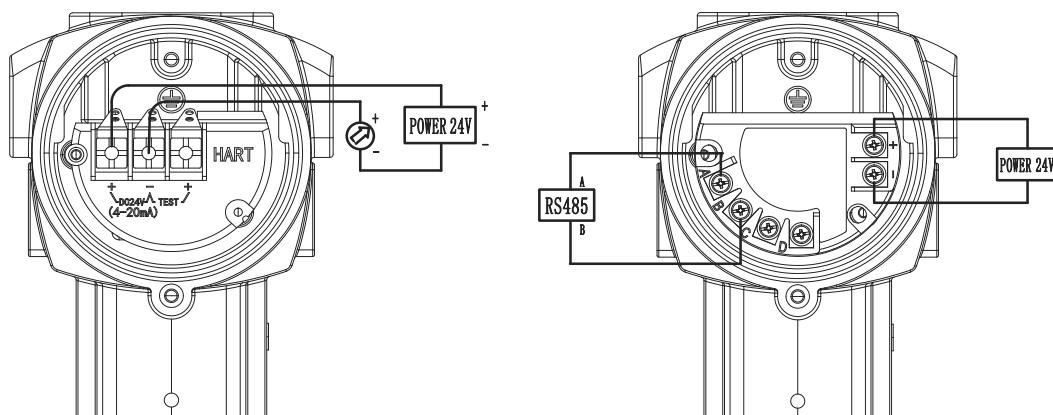

Note: the quick connection ports are equivalent to the wiring terminals.

## ORDER REF NO.

Gauge pressure

Code and Description											
Pressure Transmitter LFT700											
1	Pressure Type	A	Absolute pressure								
		G	Gauge pressure								
2	Range	H	0-100~250kPa(0~10~25mH2O)/(0~1~2.5bar)(absolute pressure)								
		I	0-0.1~1MPa(0~10~100mH2O)/(0~1~10bar)(absolute pressure)								
		J	0-0.1~3MPa(0~10~300mH2O)/(0~1~30bar)(absolute pressure)								
		B	0-200Pa~6kPa(0-20~600mmH2O)/(0-2~60mbar)								
		C	0-400Pa~40kPa(0-40~4000mmH2O)/(0-4~400mbar)								
		D	0-2.5kPa~250kPa(0-0.25~25mH2O)/(0-25~2500mbar)								
		E	0-10kPa~1MPa(0-1~100mH2O)/(0-0.1~10bar)								
		F	0-30kPa~3MPa(0-3~300mH2O)/(0-0.3~30bar)								
		G	0-100kPa~10MPa(0-10~1000mH2O)/(0-1~100bar)								
3	Diaphragm Material	S	316L								
		H	Hastelloy C								
		T	Tantalum								
4	Filling Liquid			D	Silicone oil						
5	Electrical Connection	1	M20*1.5 female thread, PVC								
		2	M20*1.5 female thread, stainless steel								
		4	1/2 NPT female thread, stainless steel								
6	Output	N	4~20mA								
		J	4~20mA+HART								
		F	RS485								
7	Process Connection	M	M20*1.5 male thread								
		G	G1/2 male thread								
		N	NPT1/2 male thread								
		A	NPT1/2 female thread								
		Y	other								
8	Mounting Bracket	N	No bracket								
		B4	Pipe bending bracket (carbon steel)								
		B5	Plate bending bracket (carbon steel)								
9	Explosion-proof					N	without Explosion-proof				
						D	Explosion-proof ExdIICt6				
10	Display						M5	With display			
							N	No display			
11	Additional Requirement						P	M20*1.5 male thread with pressure inlet welding connector			
							N	Connector material is 316L			
							K	Degreasing and cleaning treatment			
							L	Hanging tag plate			
							H	Lightning protection(withstands transient voltage)			
							E	English nameplate			
							V2	Two-valve Manifold			
LFT700		A	C	S	D	1	J	M	N	N	M5