

OVERVIEW

LFT715 Flange-mounted Transmitter consists of LFT710 Differential Pressure Transmitter and a welded level flange. The flange and the sensor are filled with silicone oil to transfer the pressure, avoiding the measurement influence of the measured medium through the pilot tube. The influence on the measurement caused by the measured medium passing through the pilot tube includes crystalline solidification vaporisation (boiling), condensation, fractionation (heavy change), etc. It is used to measure the pressure of liquids, gases and steams and then convert it into a 4-20mA signal. The measurement principle of LFT715 is the same as LFT710. The only difference lies in the pressure transfer route on the high pressure side: The pressure on the high pressure side is firstly transmitted through the diaphragm of the level flange and the filled oil, then through the transmitter body and finally reach the high pressure side of the measuring sensor.



STANDARD SPECIFICATIONS

Pressure range is calibrated based on the standard zero point, stainless steel 316L diaphragm, filled liquid is silicone oil.

1) Pressure calibration reference accuracy

Including linearity, hysteresis and repeatability from zero point			
Linear output accuracy	TD≤10	±0.2%	Standard range: 40kPa, 250kPa, 1MPa, 3MPa
	10 < TD≤100	±0.02TD%	
Note: TD is range turn down ratio. When $ URV \geq LRV $, TD=URL/URV; when $ URV \leq LRV $, TD=URL/LRV			

2) Power supply influence

When the power supply voltage varies within 12~36 VDC, if zero point and span variation not exceed ±0.005%*URV per voltage, the influence can be ignored.

FUNCTIONAL SPECIFICATION

1) Range

Range/Upper and lower range limits(URL&LRL)		kPa	Range ratio TD
C	Range	1~40	1~40
	URL&LRL	-40~40	
D	Range	2.5~250	1~100
	URL&LRL	-250~250	
E	Range	10~1000	1~100
	URL&LRL	-500~1000	
F	Range	30~3000	1~100
	URL&LRL	500~3000	

2) Range selection

Within the upper range limit (URL) and lower range limit(LRL), you can adjust the TD value within the allowable range to select the range. For example, if URL and LRL -40~40kPa, then adjust the TD value to 10 and select the output of 0~4kPa or -4~4kPa. To ensure accuracy, the TD value should be as small as possible, generally within 10.

3) Zero point setting

Zero and Span can be adjusted to any value within the measuring range in the table, as long as calibrated span \geq minimum span.

4) Impact of the installation position

The level flange can be mounted in any position. The best condition is to keep the flange in a vertical position, and the offset caused by positional deviation can be corrected by zero clearing.

5) Output

Signal	Type	Output method
4~20mA	linear	two-wire
4~20mA+HART	linear	two-wire
RS485	linear	four-wire

6) Alarm current

Low alarm mode (minimum): 3.8 mA
High alarm mode (maximum): 20.8 mA
No alarm mode (hold): maintain the effective current value before the fault
Alarm current standard setting: High alarm mode

7) Response time

Total damping constant time: Equal to the sum of the damping constants time of the electronic circuit components and the sensing diaphragm box.
Electronic circuit components damping time: 0-60S adjustable
Sensing diaphragm box damping time: ≤0.2S
Start-up time after power failure: ≤5S
Data recovery to normal use time; ≤2S


8) Environmental temperature

Item	Operation Conditions
Ambient working temperature	-20~70°C with display
Storage temperature	-40~85°C
Ambient humidity temperature	5-100%RH@40°C
Protection level	IP65
Hazardous occasions	ExdIIC T6

INSTALL

Power supply and load conditions

Output	Power Supply Requirement
Current	14.5~36VDC, load resistance during communication 250 ~600Ω
RS485	12-36VDC

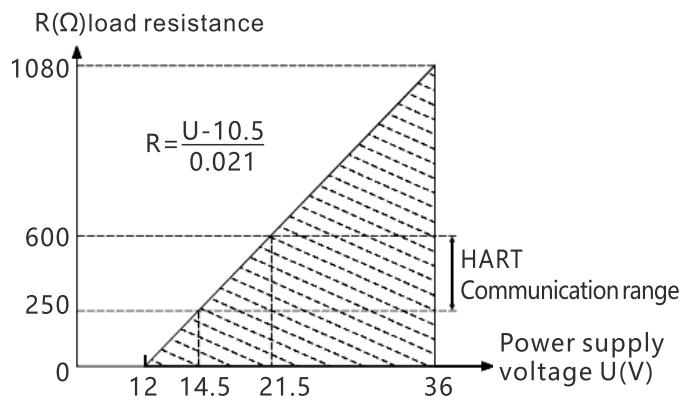


Electrical connection

Item	Description
Electrical connection	Aluminum alloy junction box, 2 wire outlet ports with female thread M20*1.5, the main body is light blue, white cover
Wire outlet protection	One end with M20*1.5 waterproof connector, the other end with plug, PVC material, suitable for wire diameter 6-8mm, protection class IP65
Wire outlet protection	Explosion-proof configuration, one end with female NPT1/2 thread, the other end with a plug, stainless steel, for wire diameter 6-8mm, protection class IP65
Wire outlet protection	Explosion-proof configuration, one end with internal thread M20*1.5, the other end with a plug, stainless steel, for wire diameter 6-8mm, protection class IP65


PHYSICAL SPECIFICATIONS

Measuring diaphragm enclosure	Stainless steel 316L
Diaphragm	316L, Hastelloy, Tantalum, FEP, PFA, PTFE
Process flange	Stainless Steel 304, Stainless Steel 316L
Nuts and bolts	Stainless steel (A4), colored zinc
Sealing ring	NBR, FKM, EPDM
Transmitter housing	Aluminium alloy material
Housing Seal	Nitrile rubber (NBR)
Nameplate	Stainless steel 304

DIMENSIONS (mm)

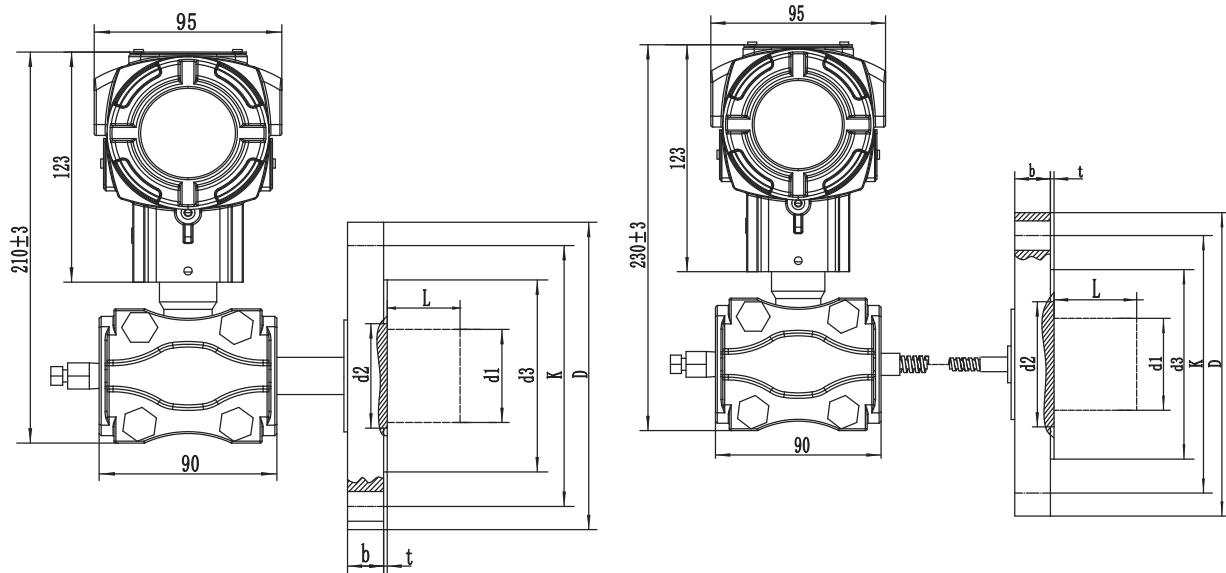

ELECTRICAL CONNECTION

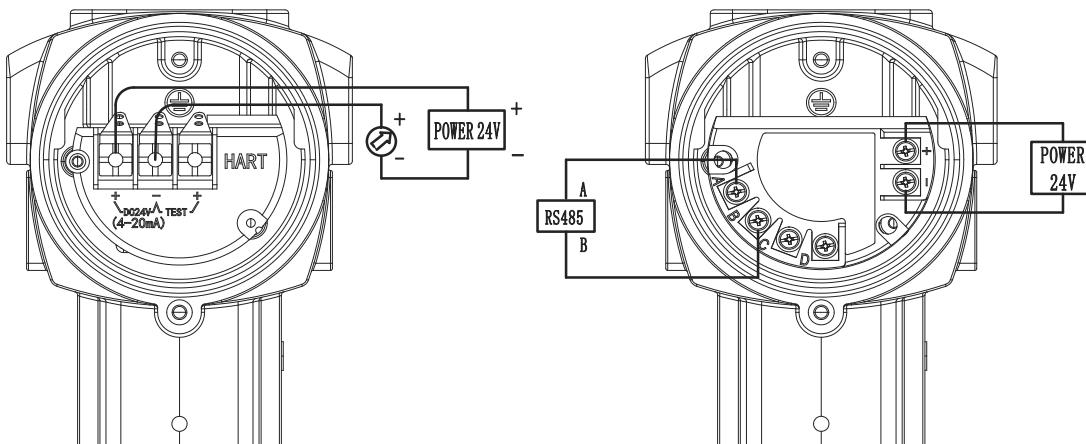

ORDER REF NO.

Code and Description																
Single Flange Differential Pressure Transmitter LFT715																
1	Range	C	0-1kPa~40kPa(0-100~4000mmH2O)/(0-10~400mbar)													
		D	0-2.5kPa~250kPa(0-0.25~25mH2O)/(0-25~2500mbar)													
		E	0-10kPa~1MPa(0-1~100mH2O)/(0-0.1~10bar)													
		F	0-30kPa~3MPa(0-3~300mH2O)/(0-0.3~30bar)													
2	Diaphragm Material	S	316L													
		H	Hastelloy C													
		T	Tantalum													
3	Filling Liquid	D	Room temperature silicone oil (-30~180°C)													
		E	Low temperature silicone oil (-40~80°C)													
		F	High temperature silicone oil (-10~350°C)													
4	Electrical Connection	1	M20*1.5 female thread, PVC													
		2	M20*1.5 female thread, stainless steel													
		4	1/2 NPT female thread, stainless steel													
5	Output	N	4~20mA													
		J	4~20mA+HART													
		F	RS485													
6	Flange Standard	N	HG-T20592-2009(PN type)(European DIN Standards)													
		J	HG-T20615-2009(Class type)(America ANSI Standards)													
		F	Other flange standard													
7	Flange Type	R	Flange type													
		E	Insert tube type (Only for DN80, 2 inch and above)													
8	Flange Size	D50	DN50													
		D80	DN80													
		D100	DN100													
		DXX	Other													
9	Nominal Pressure Rating	P1	PN10													
		P2	PN16													
		P3	PN25													
		P4	PN40													
		PX	Special Grade													
10	Insertion Tube Extension Length	S0	0 (without insertion tube)													
		S2	50mm													
		S4	100mm													
		S6	150mm													
		S8	200mm													
		SX	Customized length													
11	Capillary Tube Length	<input type="checkbox"/>	1~10m (4m: 04)													
12	Explosion-proof	N	without Explosion-proof													
		D	Explosion-proof ExdIICt6													
13	Display	M5	With display													
		N	No display													
14	Additional requirements	N	Connector material is 316L													
		K	Degreasing and cleaning treatment													
		L	Hanging tag plate													
		H	Lightning protection (withstands transient voltage)													
		E	English nameplate													
LFT715		C	S	D	1	N	N	R	D50	P1	S0	04	N	N		