


LFP300 SERIES

Diaphragm Booster Pump



Connection

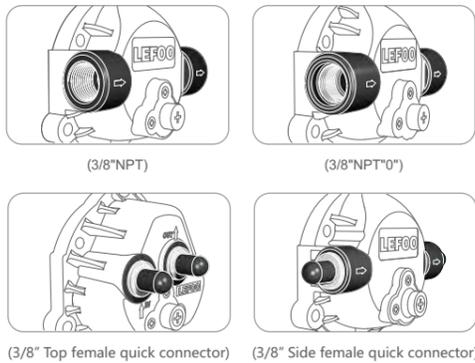

Product Specifications


① Self-priming type

Model	Voltage	Inlet Water Pressure	Working Pressure	Working Current	Working Flow Rate	Open Flow	Bypass Pressure	Maximum Current	Self-priming Height
LFP1300S	24V DC	0MPa	0.5MPa	≤3.5A	≥2600mL/min	≥3200mL/min	0.8-1.0MPa	≤4.5A	≥3.0m

② Normal type

Model	Voltage	Inlet Water Pressure	Working Pressure	Working Current	Working Flow Rate	Open Flow	Bypass Pressure	Maximum Current	Self-priming Height
LFP1300J	24V DC	0.2MPa	0.5MPa	≤2.3A	≥2700mL/min	≥4000mL/min	0.85-1.05MPa	≤3.2A	/
LFP1300JD						≥3500mL/min	0.85-1.0MPa		
LFP1300J-V				≤2.4A	≥2700mL/min	0.9-1.1MPa	/		
LFP1300W-P				≤2.4A	≥3500mL/min	0.85-1.0MPa			
LFP1300W				≤2.4A	≥3500mL/min	0.85-1.0MPa			

Flow Curve

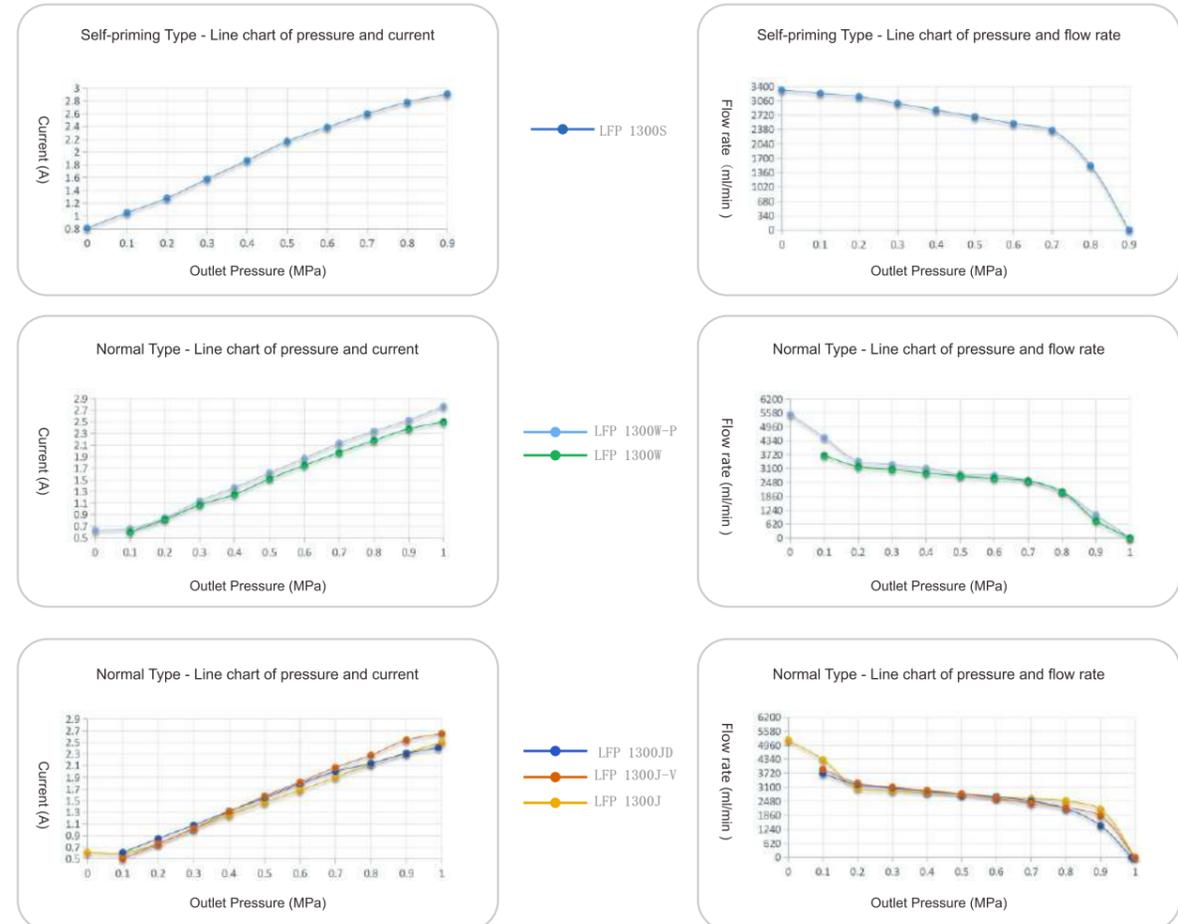

Mounting Dimension: mm

