

## LFP203/DB DC Motor Peristaltic Pump


Color X6

### FEATURES

- Large flow, small volume
- Low noise, long life, high precision
- Positive and negative rotation
- Easy tube replacement without tools




### APPLICATION INDUSTRY



SPECIFICATIONS									
Model	Installation Method	Motor Type	Control Method	Function	Working Voltage	Power	Weight	Working Environment	Rollers
P203DB	Stainless steel mounting plate (as standard) (customizable)	Brush DC motor	Power-on operation	Fixed flow rate	DC12V、DC24V	≤10W	160g	Temperature 0-45°C, Relative Humidity <85%RH	Standard with 2 rollers(4 rollers are available)

FLOW RATE: ml/min			
Voltage	Flow Range	Tube Size	Tube Type
DC12V、DC24V	125~305	3*5	BPT Tube/Silicone Tube/A60-F/Viton Tube
	110~315	16#	
	190~490	4*6	

### MOUNTING DIMENSION: mm

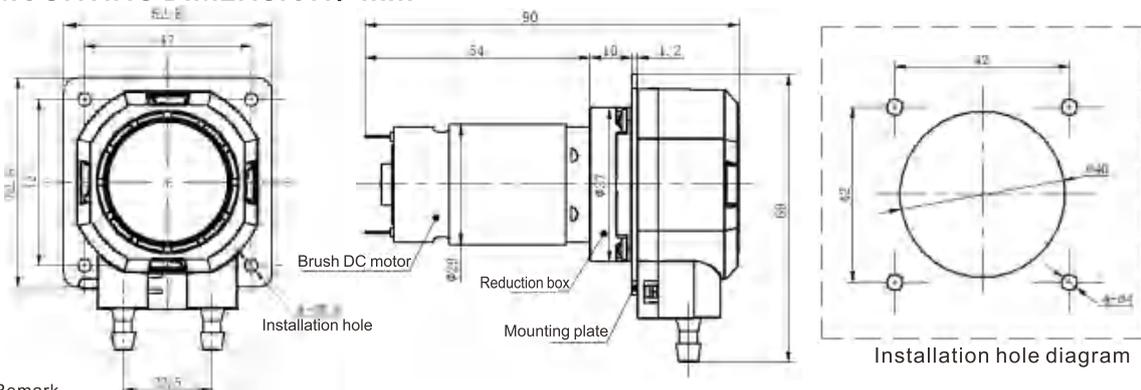

#### Remark

1. The above flow parameters are tested under the conditions of room temperature 23°C, standard atmospheric pressure, clean water, suction lift 0.2m, lift 0, and no pressure. For reference only.
2. Pump flow rate can be affected by viscosity, density, medium temperature, ambient temperature, inlet and outlet pressure, suction lift and lift of pump. To ensure the accuracy of the pump, it is necessary to keep the above factors without significant changes.