


LFP600-1000 SERIES

Brushless Diaphragm Booster Pump




Interface method

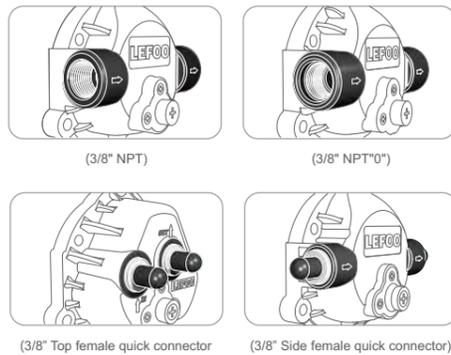

Product Specifications

| Model | LFP1600W-B | LFP1600W(A) - B | LFP2800W-B | LFP21000W-B |
|----------------------|--------------|-----------------|-------------|-------------|
| Voltage | 24V DC | | 36V DC | |
| Inlet Water Pressure | 0.2MPa | | 0.2MPa | |
| Working Pressure | 0.7MPa | | 0.7MPa | |
| Working Current | ≤3.2A | ≤4.0A | ≤2.8A | ≤3.5A |
| Working Flow Rate | ≥3200ml/min | ≥3500ml/min | ≥4000ml/min | ≥5000ml/min |
| Open Flow | ≥6000ml/min | | ≥6500ml/min | |
| Bypass Pressure | 0.85-1.05MPa | | 1.05-1.2MPa | |
| Maximum Current | ≤4.0A | ≤4.5A | ≤3.5A | ≤4.5A |

Flow Curve

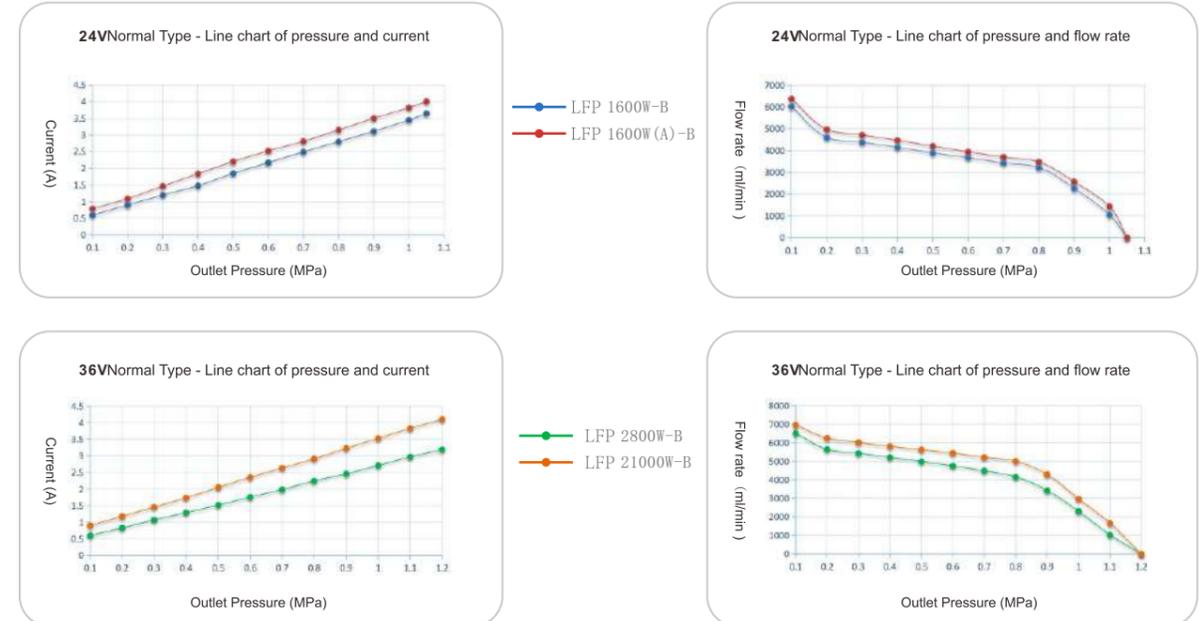

Installation size

